

HEIGHT ADJUSTABLE TABLES



2020 CATALOGUE

HEIGHT ADJUSTABLE TABLES 2020 CATALOGUE

| | |
|---|-------------|
| 2 | DOUBLE LEG |
| 4 | TRIPLE LEG |
| 6 | SINGLE LEG |
| 7 | ACCESSORIES |
| 8 | PRICING |

Height Range — 23.5" to 49.5" (without desktop)

Base Spread — 24"

Travel Speed — 1.5" per second (no load)

Load Capacity — 1000N, 225lbs

Duty Cycle — 10% max, 2 mins on, 18 mins off


Soft start/stop

Adjustable leveling studs

4 memory presets

UL/CSA Approved

Accommodates 24"/30"x48"-72" worksurfaces




DOUBLE LEG

The two legged height adjustable base is twenty-four inches in depth and has a width that spreads forty to seventy-one inches allowing it to accommodate our standard worksurfaces over twenty four inches deep and a recommended forty eight to seventy two inches wide. These electronic metal bases come with controls that have four programmable settings and a height range of twenty-three and a half to forty-nine and a half inches. All bases are UL/CSA approved and have a load capacity of 1000N, 225 lbs. Finish colours available for this double leg adjustable height base include Black (BK), Silver (SL), and White (WH).





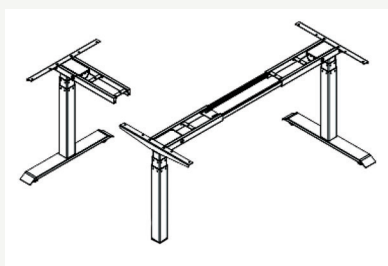

Height Range — 23.5" to 49.5" (without desktop)

Base Spread — 24"

Travel Speed — 1.5" per second (no load)

Load Capacity — 1500N, 337lbs

Duty Cycle — 10% maximum, 2 mins on, 18 mins off

Soft start/stop

Adjustable leveling studs

4 memory presets

UL/CSA Approved

TRIPLE LEG

The three legged height adjustable base is forty to seventy-one inches wide and can accommodate an overall depth of 48"-72" inches. These electronic metal bases come with controls that have four programmable settings and a height range of twenty-three and a half to forty-nine and a half inches, allowing both main and return worksurfaces to move together. All bases are UL/CSA approved and have a load capacity of 1500N, 337 lbs. Finish colours available for this triple leg adjustable height base include Black (BK), and Silver (SL).



Height Range — 27" to 45" (without desktop)
Base Spread — 24"
Travel Speed — 1.5" per second (no load)
Load Capacity — 800N, 180lbs
Duty Cycle — 10% max, 2 mins on, 18 mins off
Soft start/stop
Adjustable leveling studs
4 memory presets
UL/CSA Approved



SINGLE LEG

The single leg height adjustable base is twenty-four inches deep overall by twenty-seven and a half wide. It accommodates twenty-four and thirty inch deep worksurfaces, thirty-six and forty-two inches wide. These electronic metal bases come with controls that have four programmable settings and a height range of twenty-seven to forty-five inches. All bases are UL/CSA approved and have a load capacity of 800N, 180 lbs. This triple leg adjustable height base is available in Black (BK).

ACCESSORIES

MODESTY

Add a stylish modesty panel to your height adjustable worksurface to allow for privacy during your work day. Available in all standard Links finishes in various sizes. Worksurfaces will be predrilled to accept modesty panel when a drawing is supplied with your order.



WIRE MANAGEMENT

Add a smart and conveniently coiled wire management to your height adjustable worksurface to hide all wires. The coil will adjust to the height as you raise and lower the worksurface. Available in Black or Silver.



PRICING


TOPS



MAIN WORKSURFACE

24"-30"D laminate worksurface for double leg base or primary on triple leg base. Grommet included.


Available in all standard 1" colours.



| | | | WIDTH | DEPTH | HEIGHT | VOLUME | WEIGHT |
|------|-------------|-------|---------|---------|---------|----------|----------|
| | CODE | PRICE | (in/mm) | (in/mm) | (in/mm) | (ft3/m3) | (lbs/kg) |
| 24"D | TOP-2448-OG | 252 | 48/1219 | 24/610 | 1/25 | 2/0.06 | 28/13 |
| | TOP-2454-OG | 284 | 54/1372 | 24/610 | 1/25 | 2.3/0.07 | 32/15 |
| | TOP-2460-OG | 315 | 60/1524 | 24/610 | 1/25 | 2.5/0.07 | 35/16 |
| | TOP-2466-OG | 347 | 66/1676 | 24/610 | 1/25 | 2.8/0.08 | 39/18 |
| | TOP-2472-OG | 377 | 72/1829 | 24/610 | 1/25 | 3/0.08 | 42/19 |
| 30"D | TOP-3048-OG | 315 | 48/1219 | 30/762 | 1/25 | 2.5/0.07 | 35/16 |
| | TOP-3054-OG | 354 | 54/1372 | 30/762 | 1/25 | 2.8/0.08 | 39/18 |
| | TOP-3060-OG | 394 | 60/1524 | 30/762 | 1/25 | 3.1/0.09 | 44/20 |
| | TOP-3066-OG | 433 | 66/1676 | 30/762 | 1/25 | 3.4/0.1 | 48/22 |
| | TOP-3072-OG | 471 | 72/1829 | 30/762 | 1/25 | 3.8/0.11 | 53/24 |

EXTENDED CORNER TOP - LEFT


Extended corner laminate worksurface, curved left. Grommet included. Available in all standard 1" colours.

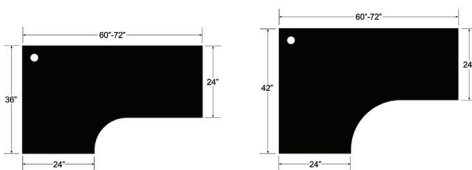

| | | | | | | |
|---------------------|-----|---------|---------|------|----------|-------|
| TOP-ECU2460-36CL-OG | 501 | 60/1524 | 36/914 | 1/25 | 3.8/0.11 | 55/25 |
| TOP-ECU2466-36CL-OG | 545 | 66/1676 | 36/914 | 1/25 | 4.2/0.12 | 58/26 |
| TOP-ECU2472-36CL-OG | 601 | 72/1829 | 36/914 | 1/25 | 4.5/0.13 | 63/29 |
| TOP-ECU2460-42CL-OG | 579 | 60/1524 | 42/1067 | 1/25 | 4.4/0.12 | 62/28 |
| TOP-ECU2466-42CL-OG | 641 | 66/1676 | 42/1067 | 1/25 | 4.8/0.14 | 68/31 |
| TOP-ECU2472-42CL-OG | 696 | 72/1829 | 42/1067 | 1/25 | 5.3/0.15 | 74/34 |

EXTENDED CORNER TOP - RIGHT


Extended corner laminate worksurface, curved right. Grommet included. Available in all standard 1" colours.

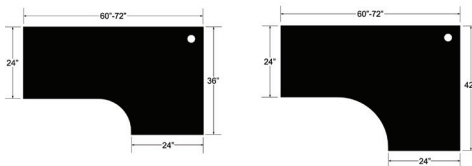

| | | | | | | |
|---------------------|-----|---------|---------|------|----------|-------|
| TOP-ECU2460-36CR-OG | 501 | 60/1524 | 36/914 | 1/25 | 3.8/0.11 | 55/25 |
| TOP-ECU2466-36CR-OG | 545 | 66/1676 | 36/914 | 1/25 | 4.2/0.12 | 58/26 |
| TOP-ECU2472-36CR-OG | 601 | 72/1829 | 36/914 | 1/25 | 4.5/0.13 | 63/29 |
| TOP-ECU2460-42CR-OG | 579 | 60/1524 | 42/1067 | 1/25 | 4.4/0.12 | 62/28 |
| TOP-ECU2466-42CR-OG | 641 | 66/1676 | 42/1067 | 1/25 | 4.8/0.14 | 68/31 |
| TOP-ECU2472-42CR-OG | 696 | 72/1829 | 42/1067 | 1/25 | 5.3/0.15 | 74/34 |

RETURN TOPS

24"D laminate worksurface for return. Grommet included. Available in all standard 1" colours.




| | | | | | | |
|-------------|-----|---------|--------|------|----------|-------|
| TOP-2424-OG | 133 | 24/610 | 24/610 | 1/25 | 1/0.03 | 14/6 |
| TOP-2430-OG | 167 | 30/762 | 24/610 | 1/25 | 1.3/0.04 | 18/8 |
| TOP-2436-OG | 201 | 36/914 | 24/610 | 1/25 | 1.5/0.04 | 21/10 |
| TOP-2442-OG | 234 | 42/1067 | 24/610 | 1/25 | 1.8/0.05 | 25/11 |

SINGLE LEG TOPS

24"-30"D laminate worksurface for single leg base. Grommet included in position 1 or position 3.

Available in all standard 1" colours.




| | | | | | | |
|-------------|-----|---------|--------|------|----------|-------|
| TOP-2436-OG | 201 | 36/914 | 24/610 | 1/25 | 1.5/0.04 | 21/10 |
| TOP-2442-OG | 234 | 42/1067 | 24/610 | 1/25 | 1.8/0.05 | 25/11 |
| TOP-3036-OG | 251 | 36/914 | 30/762 | 1/25 | 1.6/0.05 | 27/12 |
| TOP-3042-OG | 290 | 42/1067 | 30/762 | 1/25 | 1.9/0.05 | 31/14 |

Grommet available in Position 1 (POS 1), and Position 3 (POS 3)

Note: 1" clearance around worksurface is recommended to prevent finger pinch.

DOUBLE LEG BASE


Base available in Black (-BK), Silver (-SL) and White (-WH).



| | | WIDTH | DEPTH | HEIGHT | VOLUME | WEIGHT |
|--------------|-------|---------|----------|---------|----------|----------|
| CODE | PRICE | (in/mm) | (in/mm) | (in/mm) | (ft3/m3) | (lbs/kg) |
| TBL-AHTB-DBL | 1447 | 72/1829 | 23.5/597 | 50/1270 | 2/0.06 | 67/30 |

TRIPLE LEG BASE


Base available in Black (-BK) and Silver (-SL).



| | | | | | | |
|--------------|------|---------|---------|---------|---------|-------|
| TBL-AHTB-TRP | 2115 | 72/1829 | 65/1651 | 50/1270 | 3.5/0.1 | 85/39 |
|--------------|------|---------|---------|---------|---------|-------|

SINGLE LEG BASE

Base only available in Black.



| | | | | | | |
|-----------------|------|----------|--------|---------|--------|-------|
| TBL-AHTB-SGL-BK | 1224 | 27.5/699 | 24/610 | 50/1270 | 3/0.08 | 50/23 |
|-----------------|------|----------|--------|---------|--------|-------|

MODESTY PANELS

Available in all laminate colours for double and triple leg desks.

| | | | | | | |
|-------------|-----|---------|------|--------|------|----|
| AH-MOD-1248 | 231 | 48/1219 | 1/25 | 12/305 | 0.60 | 14 |
| AH-MOD-1254 | 243 | 54/1372 | 1/25 | 12/305 | 0.75 | 16 |
| AH-MOD-1260 | 255 | 60/1524 | 1/25 | 12/305 | 0.83 | 18 |
| AH-MOD-1266 | 272 | 66/1676 | 1/25 | 12/305 | 0.92 | 20 |
| AH-MOD-1272 | 289 | 72/1829 | 1/25 | 12/305 | 1 | 22 |

For predrilled worksurfaces, drawing must be provided at time of order.

CABLE MANAGEMENT SPINE

Available in Black (-BK) and Silver (-SL).

| | | | | | | |
|----------|-----|-------|-------|----|--------|-----|
| ELE-AHWM | 163 | 6/152 | 6/152 | /0 | 1/0.03 | 5/2 |
|----------|-----|-------|-------|----|--------|-----|



While every effort is made to ensure the accuracy of information contained in this price list at the time of publication, we cannot accept responsibility for inaccuracies resulting from printing errors or omissions. We reserve the right to make product improvements and price changes without notice.

© Copyright 2018 Links Contract Furniture Inc.. All Rights Reserved.

| | | | | |
|----------------------------|------------------------|------------------|-----------------|----------------|
| Head Office/Showroom: | 131 Ormont Dr. | Toronto, Ontario | Canada | M9L 2S3 |
| Local & International: | P: 416.745.8910 | F: 416.745.8779 | | |
| Toll Free - North America: | P: 855-50-LINKS | (855.505.4657) | F: 855-51-LINKS | (855.515.4657) |
| Email: | info@linkscontract.com | | | |
| Website: | linkscontract.com | | | |